



PRESSURE REGULATORS

Pressure Master® by Senninger

DURABLE

RELIABLE

PROVEN

TRUSTED

Applications

Agriculture



Landscape



Nursery



B.A. Schoenknecht Jr. Greenhouses




Product Features

Pressure Master® pre-set regulators maintain a constant outlet pressure while handling inlet pressures up to 150psi.

- Protects line and emission devices from upstream pressure fluctuation
- Dampens water hammer
- Can be installed either above or below grade
- Factory pre-set - no adjustments ever needed
- Reacts quickly to changes in line pressure (very low hysteresis properties)
- Strong, durable construction of high-impact engineering-grade thermoplastics with stainless steel compression spring and securing screws
- 100% water tested for accuracy
- Two-year warranty on materials, workmanship and performance




Performance Graph for Low-Flow Series

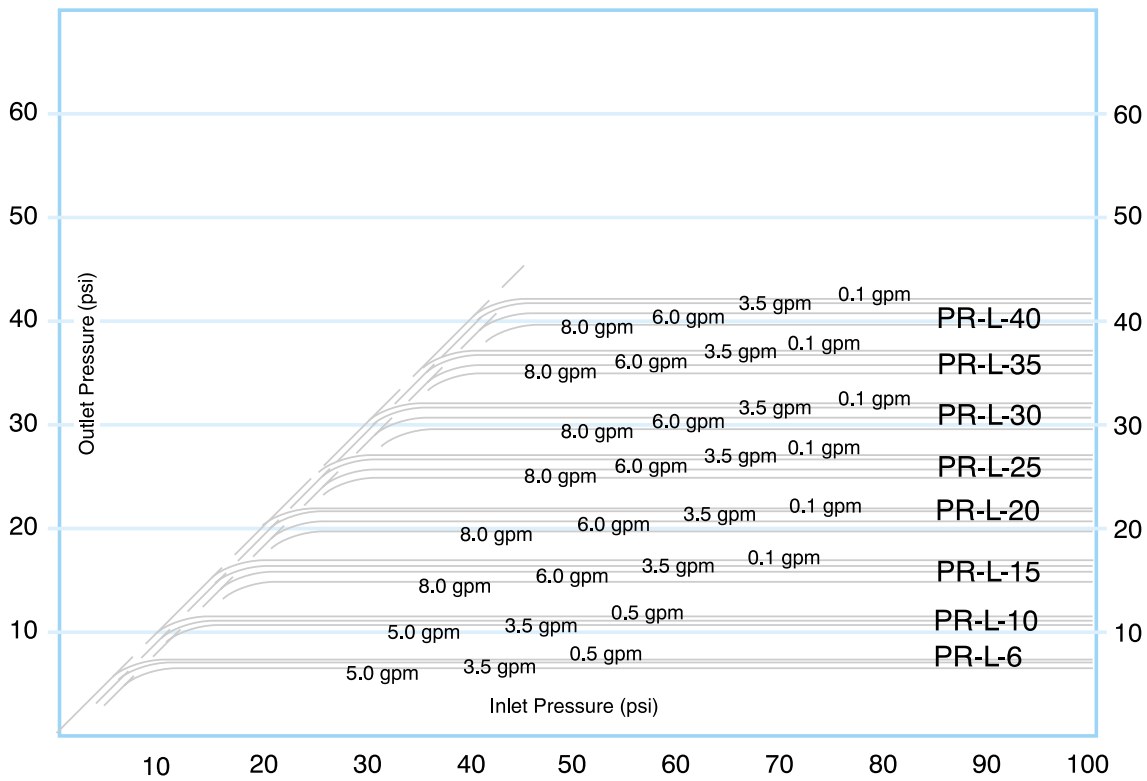


*Graphs for other models available on request.

Pressure Regulator Models & Sizes




Low-Flow (PR-075-L-XX):

- Flow: 1/10 to 8 gpm
- Inlet size: 3/4" FPT or FHT
- Outlet size: 3/4" FPT or MHT
- Factory pre-set pressures: 6, 10, 12, 15, 20, 25, 30, 35, 40 psi



Medium-Flow (PR-XXX-M-XX):

- Flow: 2 to 20 gpm
- Inlet size: 3/4" or 1" FPT
- Outlet size: 3/4" or 1" FPT
- Factory pre-set pressures: 6, 10, 12, 20, 25, 30, 35, 40, 50, 60 psi



High-Flow (PR-XX-HF):

- Flow: 10 to 32 gpm
- Inlet size: 1/4" FPT
- Outlet size: 1" FPT
- Factory pre-set pressures: 10, 15, 20, 25, 30, 40, 50 psi

CAUTION:

- Pressure regulators should be installed downstream of control valves.
- DO NOT disassemble; Pressure regulators contain compressed spring. Return to factory for repair.



P.O. Box 3760 - Ontario, CA 91761 800.828.9919 - Fax: 800.777.6162
 P.O. Box 3546 - Haines City, FL 33845 - 800.848.8153 - Fax: 800.533.6421
 8020 W. Doe Ave. - Visalia, CA 93291 - 559-651-3221 - Fax: 559-651-3207
 Visit us at: www.agproducts.com

Copyright 2003 Agricultural Products, Inc.
 All rights reserved.